

(12) UK Patent Application (19) GB (11)

2 138 931 A

(43) Application published 31 Oct 1984

(21) Application No 8403934

(22) Date of filing 15 Feb 1984

(30) Priority data

(31) 8310399
8323539

(32) 18 Apr 1983
2 Sep 1983

(33) GB

(71) Applicants
APV International Limited (United Kingdom),
P O Box No 4, Manor Royal, Crawley, Sussex RH10 2QB

(72) Inventors
Geoffrey Richard Evans

(74) Agent and/or Address for Service
Marks & Clerk, Friars House, 6/10 Parkway, Chelmsford
CM2 0NF

(51) INT CL³
F28F 3/10

(52) Domestic classification
F4S 4J1A
E2A 110 428 CAB
F2B 1B
U1S 1969 E2A F2B F4S

(56) Documents cited
None

(58) Field of search
F4S F2B E1J F4W

(54) Gasketing for heat exchanger plates

(57) In UK Patent specification GB-A 2075656, there is shown a form of gasket retention for heat exchanger plates in which a projection on the gasket passes through an aperture in the plate with an interference fit. According to the present invention the apertures 2 are made so as to provide two alternative positions for the gasket projections 3, namely a tight position as illustrated in Figure 1c and a freely movable position. The movement between positions may be by twisting, as in Figure 1c or in an elongate aperture arranged obliquely to the in use position of an elongate projection. Alternatively the movement is longitudinal e.g. in a key-hole or tapered slot aperture. The apertures may be tapered through the plates.




Fig. 1c.

GB 2 138 931 A

1/2




Fig. 1a.




Fig. 1b.




Fig. 1c.




Fig. 2a.




Fig. 2b.




Fig. 2c.




Fig. 3a.




Fig. 3b.




Fig. 3c.




Fig. 4a.




Fig. 4b.




Fig. 4c.



Fig. 4d.

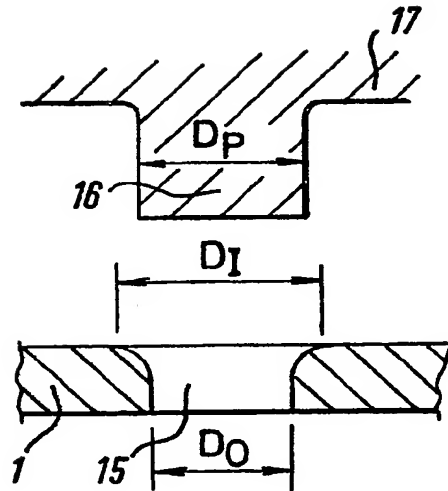


Fig. 5.

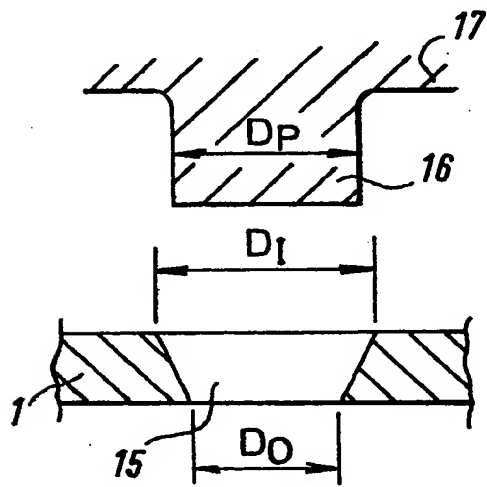


Fig. 6.

SPECIFICATION

Gasketing for heat exchanger plates

5 This invention relates to gasketing for heat exchanger plates.

10 In United Kingdom patent specifications GB-A 2028996 and GB-A 20075656, there are described various arrangements for avoiding the use of adhesives in securing gaskets to heat exchanger plates. The arrangements all include the idea of projections on the gaskets passing through apertures in the plates with some interference so as to prevent inadvertent removal without making introduction or deliberate removal unduly demanding an operation.

15 In accordance with the present invention, it is proposed that the apertures and projections should be so related that in one relative position the projections should pass easily through the aperture and should then be shiftable to a position where their removal is difficult. The latter position is, of course, the normal position of use, but the flexibility of the gasket would permit distortion or shifting to the former position for assembly and possibly removal.

25 Accordingly, the present invention consists in a heat exchanger plate having a gasket recess and a gasket held in the said recess by interengagement of a series of projections on the gasket and a series of apertures in the plate, in which the projections are movable within the apertures between a first position in which the projections may move freely in and out of the apertures and a second position in which the movement in and out of the apertures is strongly resisted by interference between the projection and the edges of the aperture.

35 The projections may be moved angularly between the two positions, or alternatively a longitudinal movement may be provided. In either case the elasticity of the gasket material is sufficient to allow some freedom of movement for this purpose. Where the movement between the positions is by twisting, the aperture may for instance be a non-symmetrical heart shape so that one side provides for free movement of the projection, whereas the other provides interference. Alternatively, a slot may be punched at an angle to the normal position of the projection when the gasket is in a position of use, so that the gasket can be manually twisted to allow the projection to pass through the slot and then when in position, the projection will be pressed hard against the edges of the slot and distorted to provide the interference.

45 Where the movement is longitudinal, the slot may be either tapered along its length or stepped, e.g. with a keyhole slot formation.

50 The projections may be of parallel-sided section and depend solely upon an interference fit for attachment into the plate apertures. Alternatively, the projections may be provided with a change in section which results in a necked portion which engages with the aperture at the minimum width of the projection to ensure retention.

55 In any of these arrangements, the apertures in the plate may be tapered in a direction through the plate so as to have a larger dimension on the side of the

plate adjacent to the main body of the gasket than on the side to which the projection projects.

This tapering may be smooth or arcuate.

60 It has been found that the mechanical retention is further enhanced by the provision of the tapered apertures formed in the plate. A tapered aperture provides a guided entry for insertion of the gasket projection and positive engagement when the projection is fitted.

75 The invention will be further described with reference to the accompanying drawings which show various forms of the invention, and in which:

Figure 1a illustrates one form of slot;

80 Figure 1b illustrates the slot of Figure 1a with a projection in the free position;

Figure 1c shows the slot of Figure 1a with the projection in the locked position;

85 Figures 2a, 2b, 2c; Figures 3a, 3b, 3c; and Figures 4a, 4b, and 4c are all views similar respectively to Figures 1a, 1b and 1c showing different forms of arrangements in accordance with the invention;

Figure 4d is a section on the line A-A of Figure 4c;

90 Figure 5 is an exploded view of the gasket projection about to enter an aperture tapered through the plate in a preferred arrangement according to the invention; and

Figure 6 is a similar view showing a modified version of a tapered aperture.

95 Turning first to Figures 1a, 1b and 1c, a portion of plate metal is illustrated at 1, and an aperture 2 is shown in the form of an asymmetric heart or cardioid in which one side is distinctly larger than the other. Figure 1b shows a projection 3 on a gasket passing through the larger side of the heart so that free movement in or out of the aperture 2 available. Figure 1c shows the projection 3 pivoted about its lower end and pushed over a protuberance 4 into a locked or tight position in the smaller half of the heart shaped aperture 2. When it is desired to remove the gasket, it may be possible to twist the projection into the free position. Alternatively it can be cut off to free the gasket for removal.

100 Figures 2a, 2b and 2c show the plate 1 having an aperture in the form of a tapered slot 5. In this case, the projection 6 is of circular section and is introduced into the larger end of the slot 5. After introduction, the gasket is slid along so that the projection 6 enters the smaller end of the slot 5 and is wedged and distorted into a tight and positively locked position.

105 Again, removal may either be by the reverse movement or by cutting off the projection 6.

110 In the arrangement of Figures 3a, 3b and 3c, the plate 1 has a punched slot 7 set obliquely to the in use position of the projection 8, so that the projection 8 can be introduced in the twisted position of Figure 3b and on release will move to the position of Figure 3c, in which it is somewhat distorted and wedged against the sides of the slot 7.

115 Removal may again be by reverse twisting or removal of the projection.

120 Figures 4a to 4d show an arrangement in which the plate 1 is formed with a key-hole slot 11 having a larger end 12 and a smaller end 13. The circular section projection 14 is introduced via the larger end 12 as shown in Figure 4b and subsequently shifted longitudinally

130

dinally in translation to the position of 4c in which the projection 14 is forced into the smaller end 13 of the key-hole slot 11 and positively engaged by a neck, as illustrated in Figure 4d.

5 The application of a necked projection may likewise be employed for any of the preceding embodiments.

Again, the projections may be cut off or removed by reverse sliding to free them from the apertures.

It is envisaged that in all cases removal of a gasket
10 may be started by cutting off one or two projections in order to release part of the length of the gasket and the remaining part may then have sufficient freedom of movement to be twisted or moved longitudinally of the gasket recess to free the projections from their
15 corresponding apertures.

Turning now to Figures 5 and 6, these show sections of typical tapered apertures 15 formed in a plate 1 for co-operation with a projection 16 provided on a gasket 17. As illustrated in figure 5, the aperture 15 is
20 provided with arcuate tapering from a maximum inlet diameter D_i to a minimum outlet diameter D_o . The arrangement is such that the projection diameter D_p lies between the values D_i and D_o .

In the arrangement of Figure 2, the tapering from the
25 maximum diameter D_i to the minimum diameter D_o is shown as being smooth.

Since the minimum diameter D_o is somewhat smaller than the effective diameter D_p of the projection, it provides an interference fit to ensure mechanic-
30 al retention.

The tapered sides of the aperture section may be equally applied to any form or shape of slot or aperture in the plate.

Various other modifications may be made within
35 the scope of the invention.

CLAIMS

1. A heat exchanger plate having a gasket recess and a gasket held in the said recess by interengagement of a series of projections on the gasket and a
40 series of apertures in the plate, in which the projections are movable within the apertures between a first position, in which the projections may move freely in and out of the apertures, and a second position, in which the movement in and out of the apertures is
45 strongly resisted by interference between the projection and the edge of the aperture.

2. A plate as claimed in claim 1, in which the projections are movable angularly between the two positions.

50 3. A plate as claimed in claim 2, in which the apertures are generally heart shaped, with one side of the heart larger than the other, so that an elongate projection will be a tight fit in one side but freely movable through the other side.

55 4. A plate as claimed in claim 1, in which the projections are movable in translation between the two positions.

5. A plate as claimed in claim 3, in which the apertures are slots tapered along their lengths.

60 6. A plate as claimed in claim 3, in which the slots are of key-hole configuration.

7. A plate as claimed in any of the preceding claims, in which the projections have a necked change in section, and movement in and out of the apertures
65 is strongly resisted by engagement at the minimum

section of the projection.

8. A plate as claimed in any of the preceding claims, in which the apertures are tapered through the plate so as to have a larger dimension on the side of the plate adjacent to the main body of the gasket than on the side to which the projection projects.

9. A plate as claimed in claim 8, in which the tapering is smooth.

10. A plate as claimed in claim 8, in which the tapering is arcuate.

11. A heat exchanger plate having a gasket arrangement substantially as hereinbefore described with reference to the accompanying drawings.

Printed in the United Kingdom for Her Majesty's Stationery Office, 8818935, 10/84, 18996. Published at the Patent Office, 25 Southampton Buildings, London WC2A 1AY, from which copies may be obtained.